

X-PAK POLYESTER CORDED STRAP PRODUCT SPECIFICATIONS – 16MM


This specification comprises the average mechanical material identification data of:

Type : CHD-16x750 Printed
Article Number : 3LCHD160750A4P

Date : 6.04.2018

1. Dimensions and Tolerances

i.	Strap Width (mm)	: 15,35	Max : 15,7	Min : 15,0
ii.	Strap Thickness (mm)	: 0,95	Max : 0,97	Min : 0,93
iii.	Strap Length (m)	: 750		
iv.	Approx Weight (kg) Excluding Packaging	: 10,18		
v.	Coil Inner Diameter (ID) (mm)	: 200		
vi.	Coil Height (H) (mm)	: 188		

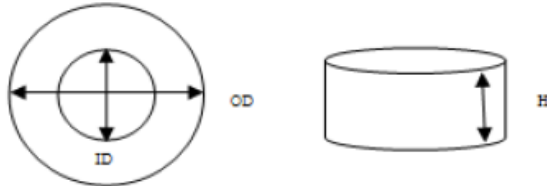

2. Mechanical Properties

i.	Break Strength (Kg)	: 530
ii.	System Strength when used with Lifex® Buckles	: 763
iii.	Elongation at Break (%)	: 9-15%

3. Packaging

i.	Pallet Size (mm)	: 1140x1140
ii.	Number of Coil per Pallet	: 90
iii.	Number of Coil per Box	: 2
iv.	Coils are secured to the pallet with 4 straps	
v.	All pallets are wrapped with stretch film	



X-PAK GLOBAL

PO Box 1163

Tamworth NSW 2340 Australia

1300 551 281